



Side Elevation (1:20)





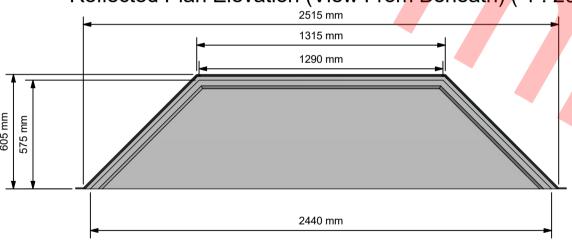

Auxiliary View (1:25)

Secure the bay roof back to the structure through the GRP upstand at 450mm max. centres.

Timber frame including roof support baffles supplied & fitted by Stormking including insulation.

A.3	No Revision	28/06/2021	ΡO
A.2	Revised Description	25/06/2021	PΟ
A.1	1st Production Issue	22/04/2021	PΟ
Α	1st Issue	21/04/2021	PΟ
REV	DESCRIPTION	DATE	AUTHOR

REVISION HISTORY					
Approved	Date	Drawing	4.4.0	4	
DP		Number	1161		
Manuf. App	Manuf. App	Sheet	Of	Revision	
RS	28/06/2021	1	1	A.3	

STORM/KING		
Amington Point, Sandy Way, Amington Ind. Est, TAMWORTH, Staffordshire. B77 4ED		

SP2C Curved Lead Effect Splayed Bay Roof

Designed by	Date	Manufacture Notes
Dan Priest	20/04/2021	1. New.
Scale	Checked	
	RS	